


LV48 | ARCHITECTURAL STORM LOUVER
Architectural Design Manual

TECHNICAL DATA



1 7/8"

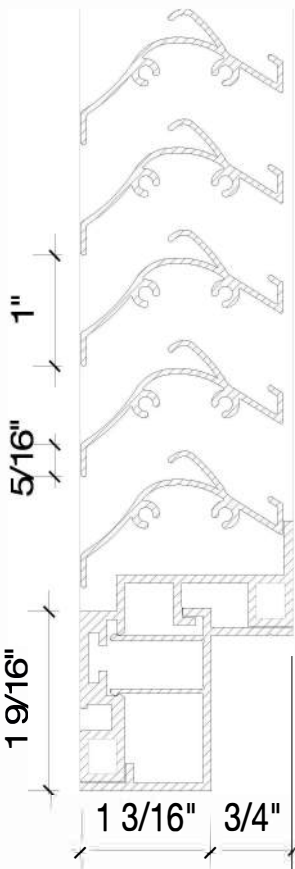

With its wide range scope of design applications LV48 louver system offers following features:

STANDARD FEATURES

- 1" blade spacing
- 7-1/8" blade depth
- 0.08" Wall thickness
- Louver type vision barrier
- Powder coating with all standard RAL colors and various anodized colors
- Free Area 41% based on standard blade spacing
- Fasteners Stainless Steel

GENERAL

Where indicaten on plan drawings or describedd in schedules, furnish and install LV48 as designed and manufactured by Bisam Facade Inc. Louver Screens shall be furnished in the configuration represented on the plan drawings and shall include installation hardware and finishes as specified and required for a complete installation.

MATERIAL

Extrusions shall be 6063-T6 alloy and temper (ASTM B221 alloy T6 temper). Powder coat conforming with the requirements of AAMA 2064 or 2605.

